

MODULAR RADIATION CONTROL BOOTHS

- Standard lead shielding of 1/16" (1.6mm) or 1/8" (3.2mm); custom lead shielding available
- Standard 84" high or greater panels
- Viewing windows: shatter-resistant lead safety glass meeting CPSC 16 CFR 1201 Cat. II safety glazing standard; lead acrylic available upon request
- Bottom opaque panels: lined with lead and faced with standard beige ABS (other colours also available); steel or laminate finish options available
- Frames: medical grade stainless steel or powder coated steel
- Modular in design – multiple configurations available tailored to your unique requirements; panels attach together at 30, 45, or 90 degrees
- Can attach to existing wall or be free standing in middle of room; tie rods to existing wall or floor plates included to ensure stability
- Quick, clean, and easy to install
- Adaptable to future modification, expansion, or relocation
- Custom-fitted millwork option



MODULAR IN DESIGN



30, 45, OR 90° ANGLES



QUICK, CLEAN, AND EASY TO INSTALL




STANDARD 84" HEIGHT (CUSTOM AVAILABLE)

OPTIONAL CUSTOM-FITTED MILLWORK



EVERY IMAGINABLE CONFIGURATION IS POSSIBLE

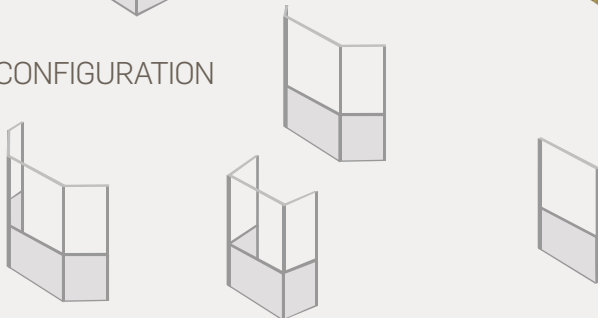

SHATTER-RESISTANT LEAD SAFETY GLASS

